

A127

OMNI-DIRECTIONAL METAL FILM CONDENSER MICROPHONE

OVERVIEW

A127 is a reference-grade omnidirectional condenser microphone, designed to capture the most accurate and purest form of acoustic instruments and sound sources. Fundamental to the A127 design is the low-noise Type 1 metal film capsule and precision-machined electro-mechanical components. The A127 delivers unmatched performance for recording, broadcast, film and sound design.

With frequency response of 10Hz-20kHz and wide dynamic range of 133dB the A127 excels in the most demanding applications. Capsule design features a precision-tuned 3-micron metal diaphragm, resulting in exceptionally accurate and stable response. The A127 circuit is designed and built to exacting specifications and is coupled to the capsule by a series of driven shields to protect the microphone from external interference and capacitance coupling. The mechanical components of the gold-plated shield and the corrosion-resistant housing are precision-machined by Audix in Wilsonville, Oregon.

FEATURES

- Pre-polarized ½ inch Type 1 metal film capsule (IEC 61094-4 compliant)
- Omnidirectional polar pattern
- Wide dynamic range
- Excellent clarity, detail and transient response
- Transformerless, low-noise circuitry
- Active driven shielding

APPLICATIONS



- Professional studio recording and live broadcast
- Sound design and field recording
- Ambient room miking
- Acoustic measurement



SPECIFICATIONS

Transducer Type	½" Type 1 metal film capsule (IEC 61094-4 compliant)
Frequency Response	10 Hz - 20 kHz
Polar Pattern	Omnidirectional
Output Impedance	150 Ohms
Sensitivity	28 mV / Pa @ 1 kHz Nom.
Signal to Noise Ratio	82 dBA
Maximum SPL	140 dB SPL
THD + N	.004 % @ 94 dB SPL 1.0% @ 140 dB SPL
Equivalent Noise Level	12 dBA
Dynamic Range	128 dB
Connector	3-pin XLR m
Power Requirements	48 V +/- 4 V Phantom
Power Consumption	3 mA
Polarity	Positive pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector
Materials / Finish	Brass / Black
Dimensions	19 mm x 122 mm
Weight	123 g

FREQUENCY AND POLAR RESPONSE

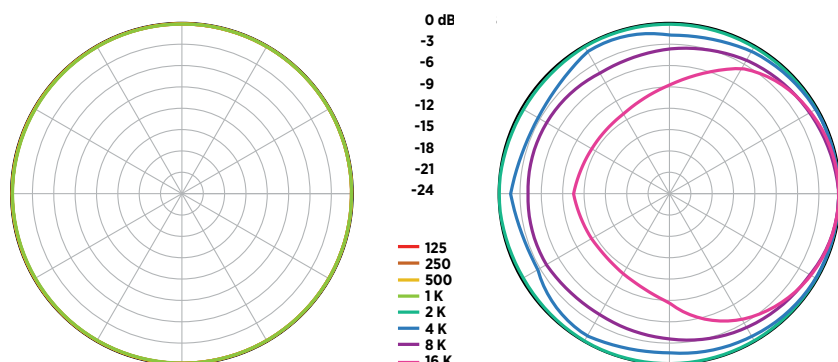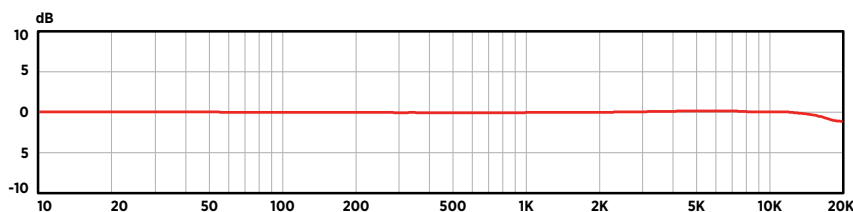

© 2022 Audix Corporation. Audix is a registered trademark of the Audix corporation. Specifications subject to change without notice. For service and warranty information, visit audixusa.com

AUDIX

A127 Spec Sheet v2.2

ADVANTAGES OF THE HALF-INCH METAL FILM CAPSULE

The A127 features a reference-grade capsule (Type 1 IEC 61094-4 compliant) with a precision-tensioned metal film diaphragm, providing consistent and reliable performance, even in the most demanding environments. The half-inch size of the diaphragm represents the “sweet spot” for acoustic sound capture, which is why it has become the standard for acoustic measurement. The ultra-thin, 3-micron metal film diaphragm provides excellent transient response and a level of detail and realism simply not attainable with conventional diaphragm materials.



DIAGRAM

Active Driven Shield

protection from external interference and capacitive coupling

Electronic Circuit

designed and manufactured by Audix in Wilsonville, OR.



High Sensitivity Reference-Grade Capsule

half-inch metal film capsule provides consistent, accurate, low-noise performance.

Precision-Machined

Teflon and brass components are meticulously combined for elegance and durability

USER TIPS

For musical applications such as symphony orchestra, strings, brass, choir, pipe organ, percussion and other acoustic instruments, the phase response, accuracy and clarity of the A127 make it the perfect choice for spot miking, as well as mid-field and far-field applications. Metal film omnidirectional microphones are able to capture the complete character, tonality, and essence of an instrument in the most uniform and accurate fashion.

With its omnidirectional polar pattern, the A127 excels as a room mic and can be incorporated into a variety of stereo miking techniques. Professional recording engineers often use a stereo pair of omnidirectional microphones for recording orchestra, stringed instruments and string ensembles, piano and piano ensembles, classical guitar, pipe organ and choir. Depending on the size and acoustics of the room, omnidirectional microphones will most accurately recreate the experience of being in the audience.

Given its compact size, low-noise preamp and extraordinary stability, the A127 is ideal for field recording, documentaries, sound gathering, and acoustic measurements.

Further miking techniques may be found at www.audixusa.com.


SUPPLIED ACCESSORIES

- **DCLIP** - Heavy-duty nylon molded snap-on clip
- **POUCHAXSM** - Protective zippered carrying case
- **WSA127** - Acoustical windscreen

OPTIONAL ACCESSORIES

- **APS2** - Two-channel 48 V phantom power supply with 110 V switchable to 240 V and detachable power cord
- **DFLEX** - Dual pivot rim-mounted clip with extra-wide butterfly jaws
- **CBL20** - 20' premium XLR-XLR balanced mic cable. Quad conductor, twisted pair with braided shield for conductivity. 6 mm PVC-jacketed
- **PD133** - Pop filter to control plosives
- **SMT25** - Shockmount suspension system

DIMENSIONS

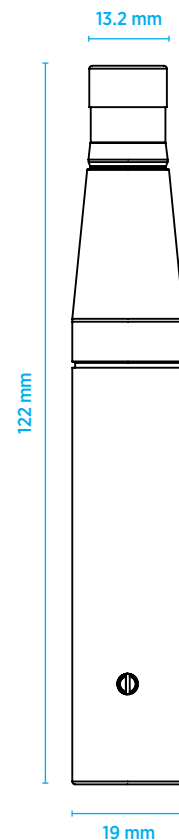

© 2022 Audix Corporation. Audix is a registered trademark of the Audix corporation. Specifications subject to change without notice. For service and warranty information, visit audixusa.com

AUDIX®

A127 Spec Sheet v2.2